


# CAPPLUS

---

## TECHNOLOGIES

### CPT 1CF TO 7.5CF V-BLENDERS

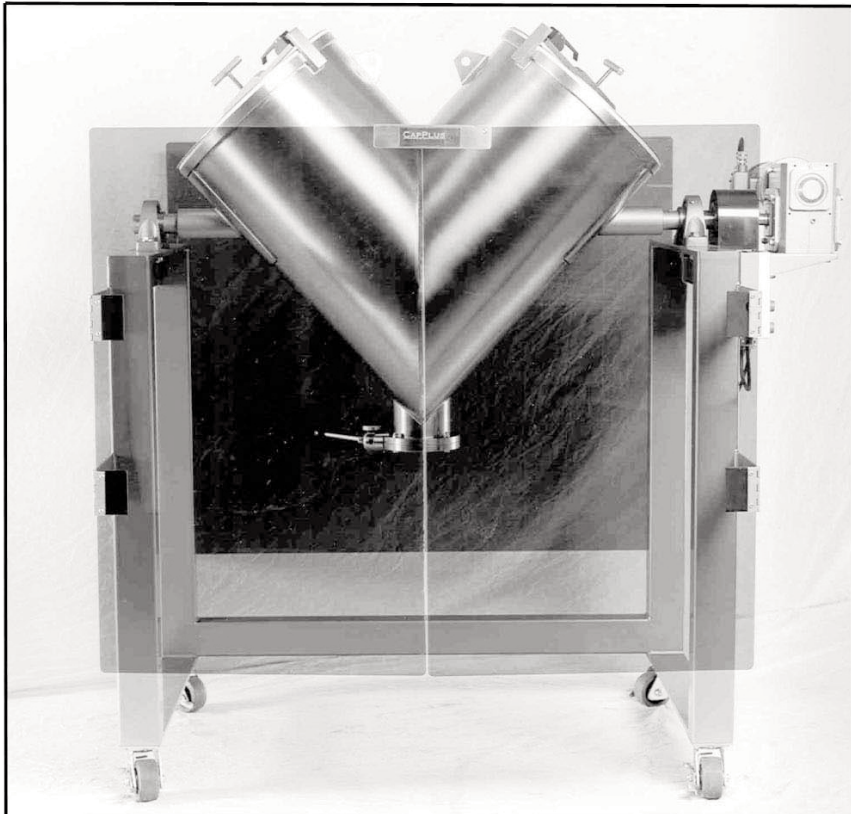

#### FEATURES

- 6" STAINLESS STEEL "SANITARY" BUTTERFLY VALVE
- STAINLESS STEEL CONTROL CABINET
- HINGED "EASY ACCESS" OPENINGS WITH TRIGGER RELEASE LOCKING SYSTEM
- CENTER PRESSURE BAR FOR EVEN PRESSURE CONTROL ON LID SEALS
- 60:1 GEAR REDUCTION FROM 0 TO 21 RPM
- 4" HEAVY DUTY LOCKING CASTERS
- PAINTED 4" CARBON STEEL SQUARE TUBING FRAME
- #4 FINISH (SATIN FINISH) ON EXTERIOR
- 2, 3, 5, & 7.5 CUBIC FOOT CAPACITY AVAILABLE

#### SPECIFICATIONS (BASED ON 5CF)

WIDTH: 56.0"  
HEIGHT: 73.5"  
LENGTH: 70.5"  
TOTAL SHELL VOLUME: 8.25 CF  
TOTAL SHELL WORKING CAPACITY 5.0 CF

#### ELECTRICAL

POWER REQUIREMENTS: 1PH / 115W / 60HZ

#### OPTIONS

- HINGED PLEXIGLAS ENCLOSURES ON FRONT AND BACK
- SAFETY INTERLOCKS ON PLEXIGLAS ENCLOSURE
- MIRROR FINISH ON EXTERIOR OF MACHINE
- MIRROR FINISH ON INTERIOR OF MACHINE
- 4" STAINLESS STEEL SQUARE TUBING FRAME
- TACHOMETER WITH DIGITAL READOUT
- TIMER WITH AUTOMATIC SHUT-OFF
- INTENSIFIER BAR
- LIQUID ADDITION INTENSIFIER BAR
- ALL WELDS GROUND SMOOTH
- 316 SS SHELL AND VALVE
- WASH DOWN SAFE CONTROLS
- EXPLOSION PROOF MOTOR AND CONTROLS
- SPECIAL VOLTAGE REQUIREMENTS

